


## LED VOLUMETRIC TROFFER

•5000K •-4°F to 104°F (-20°C to 40°C)  
•50,000 hour life •5 year limited warranty

**16063**                      **2'x4' - 46W - 5,796 lumens**

- One for one alternative LED solution to fluorescent troffers
- Single lens center basket w/ swept white sidewall reflector
- Direct/indirect illumination provides visual comfort w/ minimal glare
- Cost-effective architectural recessed LED luminaire
- Up to 50% energy savings over fluorescent troffers
- UL listed for dry/damp locations - IC rated for insulated contact
- 0-10V dimmable standard
- Instant-On w/ no warm up

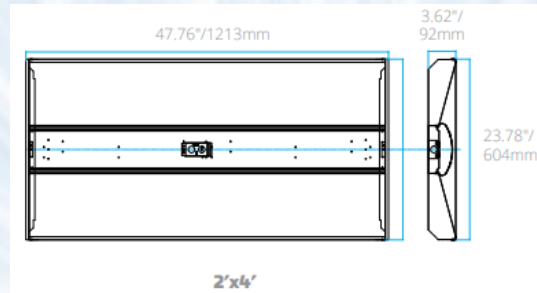

\*Conference Rooms, Schools, Offices, Retail, Hospitality, Healthcare, Reception Areas, Corridors, Foyer

\*More detailed Wiring Instructions/Installations for each is available upon request

## LED OMNIDIRECTIONAL

•HID Replacement •5000K •50,000 hour life  
•100-277V •Suitable for use in enclosed fixtures  
•5 year limited warranty

**16031**                      **Medium - 54W - 7,800 lumens - 144 lpw**

- MOL 9.13"/232mm    MOD 3.35"/85mm
- Replaces 150-175W HID
- -40°F to 140°F (-40°C to 60°C)

**16094**                      **Medium - 54W - 7,800 lumens - 144 lpw**

- MOL 9.88"/251mm    MOD 3.35"/85mm
- Replaces 150-175W HID
- -40°F to 140°F (-40°C to 60°C)

**16090**                      **Large - 100W - 13,200 lumens - 135 lpw**

- MOL 9.57"/243mm    MOD 5.87"/149mm
- Replaces 400W HID
- -4°F to 122°F (-20°C to 50°C)

- Ideal alternative to high-watt HID lamps, consuming up to 80% less energy
- Lasts 3X longer than metal halide or HPS HID lamps
- Shatter resistant for reduced risk of injury or breakage
- Universal mounting position
- Integral driver; eliminates need for external driver or ballast



\*Commercial, Industrial, Shoebox Fixtures, High Bay, Post Tops, Cobra Head

\*More detailed Wiring Instructions/Installations for each is available upon request